



# **HONDA 160 UT1 TECH MANUAL**

USAC NATIONAL TECH COMMITTEE

DIRECTOR JOHN IMPELLIZERI

USAC NATIONAL SERIES DIRECTOR

JERRY COONS

Feb 1, 2018

2018 UNITED STATES AUTO CLUB



## **HONDA GX 160 UT1 - TECH MANUAL**

**Updated Feb 1, 2018**

### **FROM 2015 USAC NATIONAL .25 MIDGET RULE BOOK, APPENDIX I 731 Engine Protest Rules (applies to Honda and Briggs classes only)**

- 1.** Protest shall be from within the same division of class only, i.e. Jr., Sr., Lt. & Hvy. 120-160, Animal or World Formula only. Competitors in the same division, and in the same race may make a protest on an engine. No protesting in Rookie Class. Handlers may not protest more than one car per event and may not protest same driver more than once per calendar year.
- 2.** Honda Engines and World Formula/Animal Engines may be protested for \$400.00 cash only plus any applicable shipping charges if necessary. No protested related inspection will be started prior to the funds being posted with the proper official.
- 3.** This protest form and cash must be submitted to the Chief Steward, or his/her designee, before the end of the race that the protested engine is participating in I.E. Checkered flag lap complete.
- 4.** The protest can only be made during an A-Main event.
- 5.** The person protesting the motor must have their engine inspected for compliance first. If the "protester's" engine is found illegal the protest is null and void and the protest fee will go to the club. If the "protester's" engine is found legal the protest will continue.
- 6.** The Chief Steward, his/her designee, will hold the protest money until the protested engine has been inspected for legality. The protested engine shall be tagged/marked and sealed as soon as it car comes across the scale if it has not been sealed prior.
- 7.** The protested engine as well as the engine of the protested party shall be immediately taken to impound and/or presented to the Tech Director for inspection. Engine must remain in impound and in the possession of tech officials throughout the entire process, including shipping to USAC Headquarters or designated tech inspection station and the transferring of funds.

8. Both protester and protestee have the option to be present at the time of inspection.
9. Any protest that is withdrawn will be assessed a \$50.00 fee that will be paid to the host club.
10. If the protested engine is found to be illegal, the motor must be completely torn down to check for additional illegalities. The Tech Director must confiscate all illegal parts and related parts from the protested engine and shall immediately forward them to the USAC Headquarters. If engine is found illegal protest money minus \$50 plus any shipping cost will be returned to the person filing the protest.
11. Refusal of protest, destroying or withholding of parts or any other lack of cooperation in this protest or inspection process shall be interpreted as an admission that the engine is illegal and shall subject the driver and handler to the conditions set forth in the Suspensions Program.
12. Any teched or protested engine, block or part which are deemed to be over maximum wear limits in one or more spots but is under maximum wear limits in other spots is subject to confiscation but not DQ'able.
13. Note: Reference to Confiscation due to Wear Limits in "Engine Block Internal Rules" of both Manuals.
14. If the engine is found legal \$400 will be given to the person whose engine was protested.

### **732 Engine Suspension Rules**

**Handlers and drivers guilty of having an engine declared illegal at technical inspections shall be disciplined as follows:**

1. First offense – up to 30-days and/or 4 race suspension for handler and driver from participating in the respective class at any USAC Sanctioned event.
2. Second offense within one year of first infraction – up to One-year suspension for handler and driver from participating in the respective class at any USAC Sanctioned event.
3. Third offense within two years of last infraction – Suspended for life from USAC's .25 Midget division.
4. Suspension for life is open to review by USAC.
5. Suspension shall begin immediately.
6. Illegal **Honda, Animal and World Formula** part/s shall be sent within five Business days to the USAC office or designee for review. The Tech director has 48 hours to determine if the part/s are legal or illegal. If the part/s are determined to be legal it shall be returned to handler. Handler shall be notified if part/s are legal or illegal.

All illegal or confiscated part/s shall be sent to National Tech Director. All legal parts shall be returned to handler.

7. If a **Honda** motor is found to have a valve oil seal during tech it shall be a race disqualification only.
8. Spark plugs, exhaust and **ignition timing** infractions are a race disqualification only.
9. Failure to go to tech and/or impound will result in a race day DQ. Refusal of tech shall be interpreted as an admission that the engine is illegal and a suspension from the class shall be immediate with all awards and qualifications being revoked with a six-month suspension driver and handler suspension at any USAC Sanctioned event.
10. For the purpose of this rule only, if a handler has multiple cars competing at one race event and more than one engine is found to be illegal at that event; it will be considered to be one offense.
11. All membership suspensions must be sent to the National Tech Director within 5 Business Days.
12. Illegal Rookie engine parts shall be confiscated (Honda or Animal) but the suspension shall not be levied against handlers or drivers for the first offense. The second offense shall result in a 30 days Suspension from Rookie.
13. The cost to appeal a suspension is \$175 plus any associated fees. The appeal must be made within 3 days of the ruling.

**Unless it says you can do it you cannot do it!**

## **GENERAL RULES**

1. Only stock Honda GX160K1 HX2, HX26 engine and gearbox will be used in this class. All parts will be stock Honda specifically made for the Honda GX160 OK1 HX2, U.S. GCAAK, and Canada # GCABT. Honda OEM 160 replacement block 12000-Z0T-406 may be used. Must be an OEM Honda replacement block. No aftermarket blocks or components.
  - a. All 160 Honda engines must be updated to the new E2 Style piston and cylinder head.
  - b. Failure to update + DQ and **minimum 6 month suspension.**
2. All stock Honda parts must be used and properly installed with the following exceptions:
  - a. Governor system may be partially or fully removed with the exception of the steel drive gear on the crankshaft. This gear must remain intact. If shaft is removed, hole must be plugged. Hole can be tapped for thread or epoxy. No welding.



inspection. Pipe coupler will be a standard, unaltered, 3/4" NP, threaded coupler. Length will be 1.000" minimum to 2.250" maximum. Exhaust pipe length will be measured by using a small diameter hose inserted through pipe to measure overall length. Flange and coupler will be included in the overall length when measuring pipe. No coating of any type may be applied to the interior of any part of the exhaust system. The intent of this rule is to have all of the exhaust pass through the muffler. All measurements are to be taken with the component pieces in the same position as they were installed and on the car. Muffler cannot be more than 1/2 turn from being hand tight.

- d. Steel or Stainless are the only materials allowed for exhaust pipes.
8. Choke butterfly & shaft must be removed. Hole may be filled only with silicone or old shaft may be cut down. No addition of material of any type to the bore or venturi of the carburetor.
9. Oil level switch may be disconnected but switch assembly must remain intact in crankcase.
10. Gearbox may be rotated to any desired position.
11. On-Off ignition switch may be removed, and hole covered. (any material; no welding).
12. All pin measuring gauges are plus tolerance. Use Class ZZ pin +0.0002
13. Exhaust oxygen sensor or temperature sensor attached to any part of Honda exhaust system is illegal.
14. Valve seals are illegal.
15. Cryogenics of any Honda part is illegal.
16. Taking parts out of service - reference to "Wear Limits" in Engine block Internal section.
17. DQ only – No suspension for: Exhaust, Air Filter Adapter, Spark Plug or more than exhaust gasket.
18. Shroud must be factory RED or BLACK.
19. Honda gaskets for the intake, carb, side cover that are green on one side tan on the other are legal.
20. All seals must have the stock spring installed in the seal and in its proper location.


## **TECH PROCEDURE**

Modifications or machining of any parts except the gasket surfaces between the cylinder head and block, and main jet in order to bring them to a stated minimum or maximum specs (blueprinting) is not legal.

1. External visual check of engine for required components: muffler, shrouds and sheet metal, and oil level sensor (this can be partially observed from outside).
2. Factory air cleaner must be removed. Any air filter may be attached to the outside of air filter adapter. Outerwear style or equivalent can be used over carburetor only with no adapter. The approved air filter adapter may be run with or without an air filter. Any air filter may be used with adapter as long as there are no devices inside the air filter or adapter. (I.E. Springs not allowed) Hose from valve cover must go into a catch can. (We are using "outerwear" to define a style not brand name).
3. The use of air filters during qualifying at asphalt and dirt events is illegal. The Senior Tech. Official reserves the right to allow filters at any event that it's deemed necessary.
4. Any type throttle linkage may be utilized. Carburetor will be unaltered with the exception of the black plastic piece on upper end of throttle shaft, this is the only part in the carburetor that can be altered, Main jet is "Non Tech". Must be an OEM Honda Jet. Only modification allowed is drilling the main hole in the jet.
5. Rear mounting brackets for Honda fuel tank may be removed.
6. The starter cup that is behind the flywheel retaining nut can be cut away to leave only the flat washer back piece that retains cooling fan.
7. The keyed end of the ring gear shaft may be shortened, drilled and tapped or machined for snap ring.
8. Heli-coiling threads for shrouds (all), valve cover, existing throttle mounting holes, oil drain, and fill holes, one of the coil bolts, and side cover bolts is allowed. Dowel holes are not to be modified or relocated, also one carburetor mounting bolt. Valve Cover mounting bolts may be replaced with studs, m6 - 1.0 or equivalent decimal or inch size.
9. Honing and deglazing of the bore is allowed.
10. Lapping the valves is allowed.
11. Blocking Airflow: No device may be used that will/or appear that it may impede airflow into the engine cooling system. This may require that the engine be run at a speed above idle by the tech personnel at the scale after the car has qualified or raced.



**160 INSULATOR**

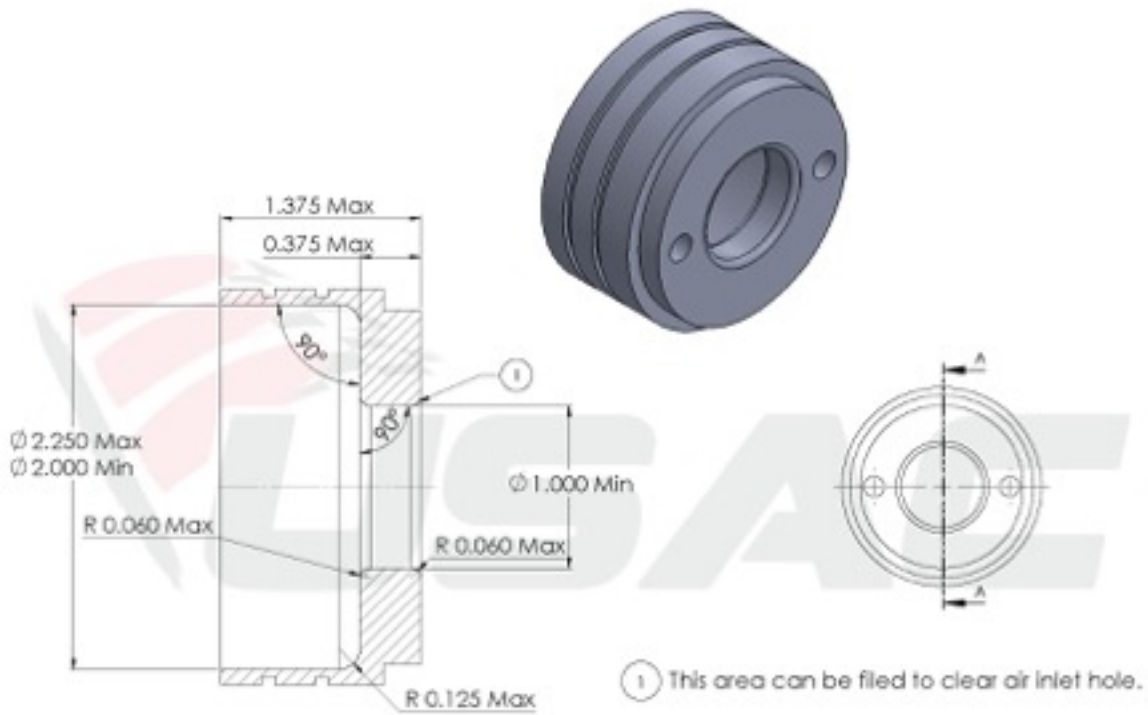



## AIR FILTER ADAPTER

Remove Carburetor:

Air cleaner adapter:

ID: 2.250" maximum  
Length: 1.375" maximum Flange  
thickness: 0.375" maximum Flange  
ID: 1.000" minimum

ID hole size straight walled, flat bottomed and parallel with carburetor using existing air cleaner mount holes.


Carb adapters with machined spacers or bosses are legal for use. Carb adapters must meet all the current dimensions with the following additions.

Only 2 bosses may be added for the purpose of mounting to the carburetor. The maximum diameter of the bosses is 0.515

The maximum length of the bosses is 0.625

The top of the bosses must be machined flat. They may not be counter bored or have a radius. A maximum 0.010 radius can be added to break the top edge.

1. Check for any alterations or worn parts that would allow additional air into engine: holes, slots, perforations, spacers, loose bolts, warped flanges etc.
2. Gasket thickness: 0.025" maximum.
3. Insulator gasket thickness: 0.025" maximum.
4. Carburetor identification numbers:
  - a. **Light 160:** BE65B, BE65Q, UT2 160 carb BE54D with Main Nozzle 16166-ZH8-W50 may be used.
  - b. **Heavy 160:** BE64Y
5. Check carburetor for alterations. Upper choke shaft hole may be sealed with silicone type sealer. Bottom hole may not be filled. No addition of material of any type to the bore or venturi of the carburetor.

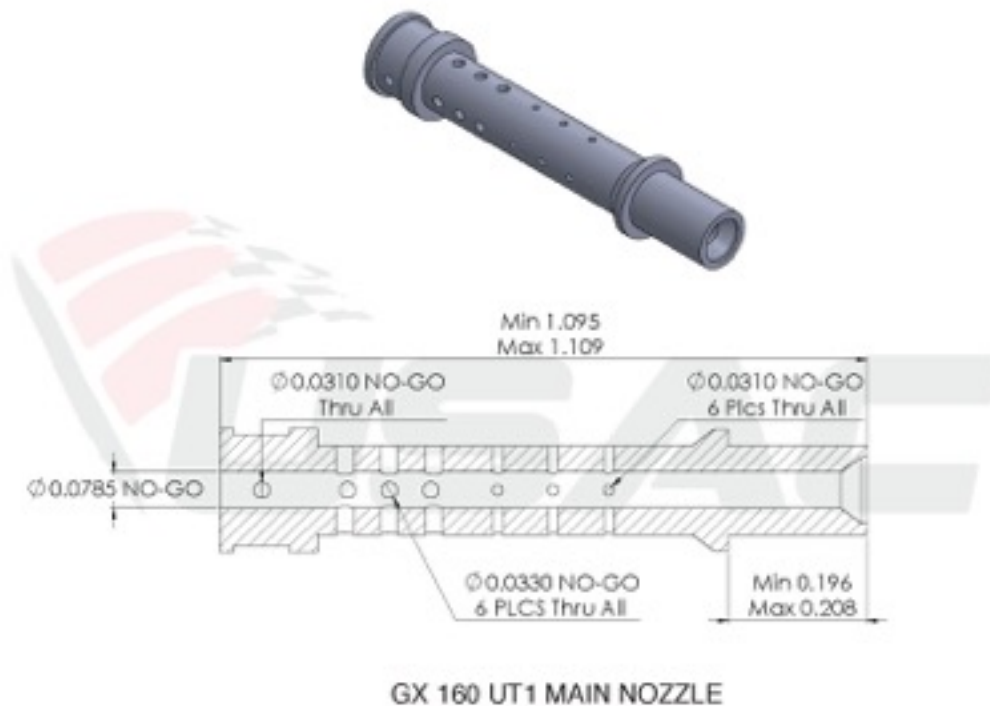

### HONDA GX160 CARB FOR LT 160

- a. BE65B, BE65Q, UT2 160 carb BE54D with Main Nozzle 16166-ZH8-W50 may be used.
- b. Carburetor Bore: Intake end: Maximum diameter 0.951" ref.
- c. Throttle end: maximum diameter 0.710.
- d. Carburetor venture bore: 0.523- no/go. This measurement is best made with a no go gauge but may be made using a telescoping gauge as a no go.
- e. Main jet must be an OEM Honda jet (Brass or Silver) Jets can be drilled to any size. Only modification allowed is drilling the main hole in the jet.
- f. Main jet – Any size allowed. This specification refers to the main jet primary small center hole only. It is not legal for any other jet modifications and will be compared to a stock known factory jet. Counter boring and/or chamfering of the larger holes of the jet on both the front and back sides of jet are not allowed.
- g. Main air jet: (0.059") no go- at back of hole.
- h. Main jet access passage: (0.096") no go.
- i. Main nozzle: bore (0.0785") no go.
- j. Main nozzle will be checked with a no/go gauge (0.424") if gauge goes over main nozzle – carb is illegal. This is best measured using a 0.519" rod type gauge with a 0.424" flat area to be used as a go gauge.
- k. Either the UT1 or UT2 main nozzle may be used.
- l. Air vent holes on the side of the main nozzle must not be plugged.
- m. Main nozzle must not be fastened into the carburetor body by anything

other than the main jet. It must not be epoxied or positioned by any other means.


- n.** Pilot jet: maximum #79 (0.0145") no go.
- o.** Pilot air jet: maximum #55 (0.052") no go
- p.** Pilot screw: no spec
- q.** Pilot seat diameter: (0.039") no go.
- r.** Tip of pilot screw: 0.020" minimum
- s.** Float bowl Vent: (0.1200") no go.
- t.** Needle valve seat: (0.070") no go.
- u.** The butterfly screw, the butterfly, and the throttle shaft must not be removed from the carburetor. Any evidence of tampering will be a disqualification and suspension.




Once you remove the **Needle Valve** you can then check the **Needle Valve seat** dimension.



Remove the idle adjustment screw and then carefully pry up on the **Pilot Air Jet** to remove.

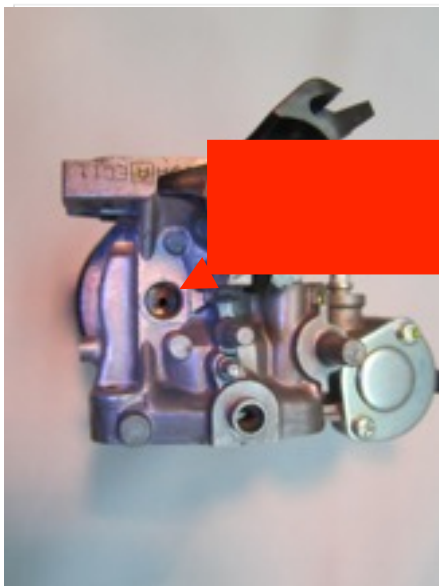

This is where the **Pilot Air Jet** is located. There is not a spec for this hole. The small hole in the bottom of the jet (black plastic) needs to be checked. Also look to make sure that the o-ring on the jet is there and in good condition.

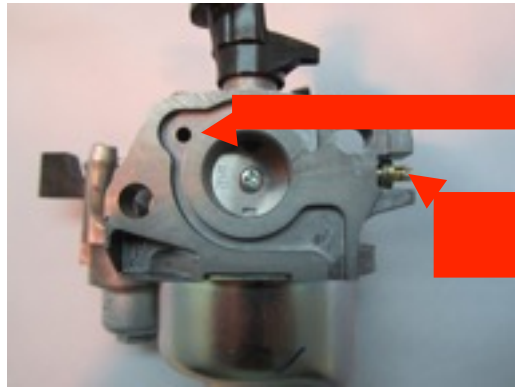

**Float Bowl Vent.**

**Pilot Screw- Check tip and Pilot seat.**




The **Pilot Air Jet** hole is just inside of this brass piece. This needs to be checked with the proper no-go gauge.

The hole at the end of the arrow is the **Main Air Jet** hole and will be checked using a pin type no-go gauge.

## HONDA GX200 CARB FOR HEAVY HONDA

- a. BE64Y Must use Honda part number 16100-Z0V-921.
- b. Must use Honda part number 16211-ZE1-000 insulator for the Heavy 160 class. This is the standard GX-160 Insulator. No modifications allowed.
- c. Carburetor Bore: Intake end: Maximum diameter 0.951" ref.
- d. Throttle End: Maximum diameter 0.751.
- e. Carburetor venture bore: 0.576 – no/go. This measurement is best made with no go gauge, but may be made using a telescoping gauge as a no go.
- f. Main jet must be an OEM Honda jet (Brass or Silver). Jets can be drilled to any size. Only modification allowed is drilling the main hole in the jet.
- g. Main jet – Any size allowed. This specification refers to the main jet primary small center hole only. It is not legal for any other jet modifications and will be compared to a stock known factory jet. Counter boring and/or chamfering of the larger holes of the jet on both the front and back sides of jet are not allowed.
- h. Main air jet: (0.0595") no go – at back of hole.
- i. Main jet access passage: (0.096") no go.
- j. Main nozzle: bore (0.0670") no go.
- k. Main nozzle will be checked with a no/go gauge (0.449" maximum). If the gauge goes over main nozzle – carb is illegal. This is best measured using a 0.572" rod type gauge with a 0.449" flat area used as a go gauge.
- l. Air vent holes on the side of the main nozzle must not be plugged.
- m. Main nozzle must be fastened into the carburetor body by anything other than the main jet. It must not be epoxied, or positioned by any other means.
- n. Pilot jet: +/- 0.001 (0.018").
- o. Pilot air jet: (0.056" no go.
- p. Pilot screw: no spec
- q. Pilot seat diameter: (0.039") no go.
- r. Tip of pilot screw: 0.020" minimum.
- s. Float bowl vent: maximum #31 (0.120") no go.
- t. Needle valve seat: (0.070") no go.
- u. The butterfly screws, butterfly, and the throttle shaft must not be removed from the carburetor. Any evidence of tampering will be a disqualification and suspension.
- v. Fuel inlet can be turned to clear blower cover.

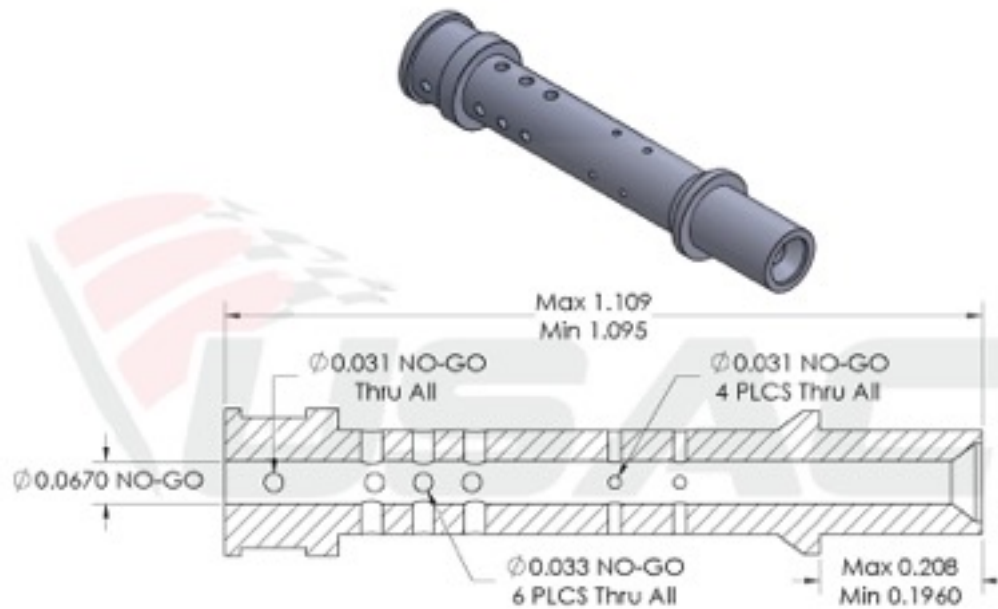

GX 200 MAIN NOZZLE

## TOP END

1. All pieces of the stock engine-cooling shroud must be properly installed.
2. There must be no addition or subtraction of any material from the shrouding except for the covering of the switch hole (any material). Starter cup may be altered to be used as washer retainer for the fooling fan.
3. Remove engine-cooling shrouds. Remove valve cover.
4. Zero dial indicator after exhaust bump. (0.050) ref.
5. Maximum valve lift will be checked from the top of valve spring retainer. Valves may be adjusted to zero clearance or shims may be installed to create zero clearance. This may dictate making special shims, as it is difficult to insert feeler gauge blades so as not to interfere with indicator contracts on retainer.

Valve Lift:	Intake:	0.245 maximum
	Exhaust:	0.255 maximum



### **CYLINDER HEAD, HEAD GASKET, VALVES, SPRINGS**

1. Remove cylinder head.
2. Thickness of head will be measured from valve cover surface to head gasket surface at the side, at a position in line with upper intake and exhaust flange bolt. No angle milling of surface.
  - a. **2.911 MINIMUM**
3. Head gasket thickness:  
0.040" minimum thickness of inner rim.
4. Remove Valves.
5. Inspect retainers for alteration that would increase valve spring pressure. Both intake and exhaust must have stock Honda retainers. Exhaust valve only can have lash cap and corresponding retainer.
6. Thickness of retainer will be:  
Intake: 0.228" minimum  
Exhaust: 0.241" minimum.
7. Flange thickness of retainer will be:  
Intake: 0.110" maximum  
Exhaust: 0.070" maximum
8. From flat of flange to machined surface:  
Intake: 0.148" minimum  
Exhaust: 0.165" minimum
9. All valve oil seals must be removed
10. The use of valve seals is illegal and will result in applicable suspension per Honda suspension program.



## VALVE SPRINGS

## VALVES



**INTAKE VALVE ASSEMBLY**



**EXHAUST VALVE ASSEMBLY**

1. Valve springs will be stock Honda springs and will not be altered in anyway. Use of Honda GX 120 or 140 valve spring is legal.
2. 160 spring
  - a. Wire diameter: 0.071" maximum
  - b. Outside Diameter of spring: 0.71" maximum
  - c. Number of total coils: 5.3
  - d. Spring pressure: 11lbs maximum at 0.812"
  - e. Stacked length will be: 0.394" maximum
3. 140 spring
  - a. Wire diameter: 0.079" maximum
  - b. Outside diameter of spring: 0.816" maximum
  - c. Total number of coils: 7
  - d. Spring Pressure: 16 lbs maximum at 0.812"
  - e. Stacked length: 0.524" maximum



## **ROCKER ARMS – PUSH RODS – STUDS**

1. Rocker arms will be stock Honda and will not be altered in any way.
2. Rocker arm studs will be stock Honda. They or their mounting position may not be altered in any manner. No heli-coiling of mounting holes. No bending of studs.
3. Push rods will be stock Honda and will not be altered in any way. Push rod length - 5.279" maximum

## **ENGINE BLOCK**

**“Wear Limits/Parts Out of Service”** USAC reserves the right to confiscate 160 Honda engine parts deemed illegal or at USAC maximum wear limits. EXAMPLE: cylinder bore will be 2.682 max. All measurements taken from top to the bottom of the bore parallel to crank, 90 degrees from crank. Any cylinder block that has one measurement over USAC maximum wear limits will be taken out of service. If no measurements exceed USAC maximum wear limits the part of block will not be confiscated. Handler has the right to have confiscated parts returned to them but will be rendered unusable.

1. Check valves for dimensions and weight.
2. Valve seating surface must be factory ground to a single angle only, 45 degrees. There will be no other angles ground on any part of valve. Valves must not be polished, lightened or altered in any way.
3. Valve weight:  
Intake 22 grams minimum  
Exhaust 22 grams minimum
4. Drawing of valve dimensions (Intake valve followed by Exhaust valve).

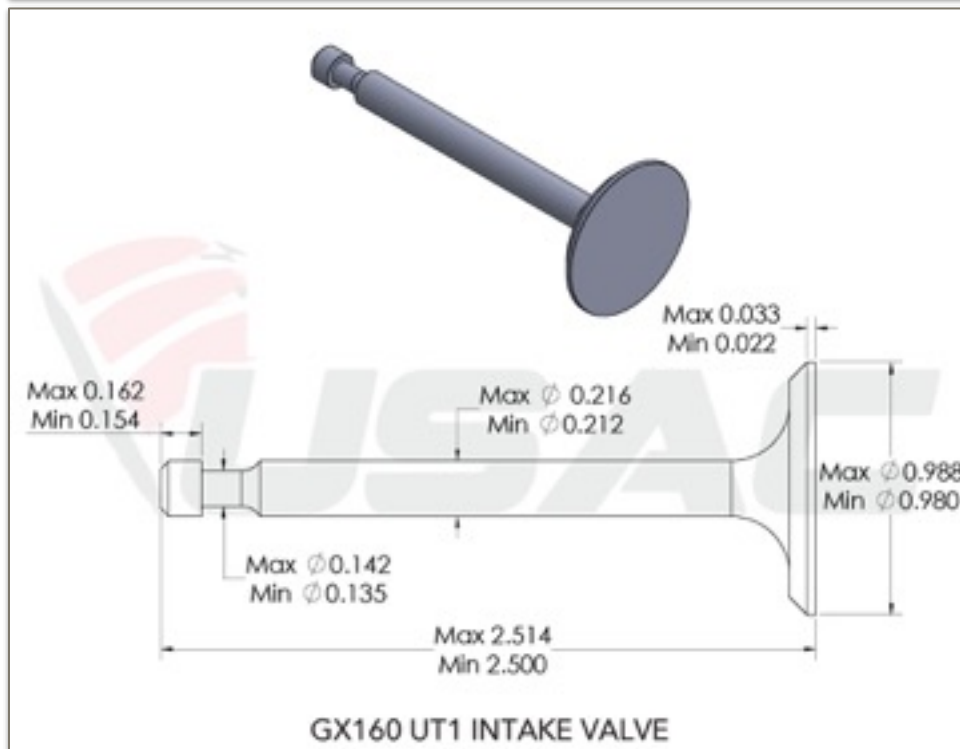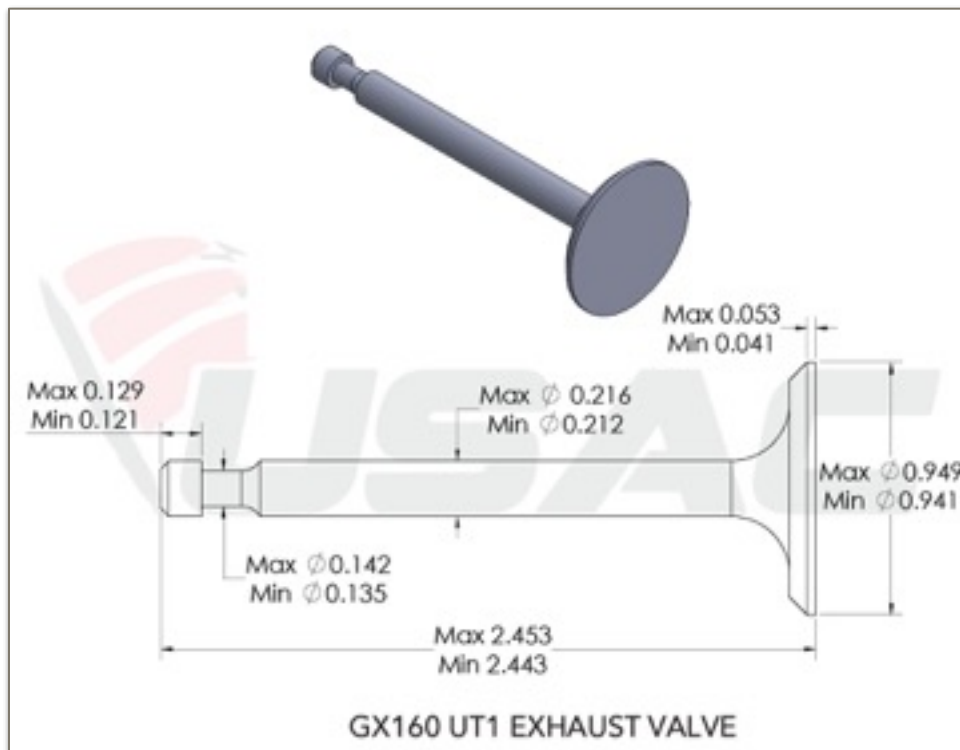

## HEAD

1. Cylinder head will be in “as cast” and in factory machined condition and there must be no addition or subtraction of metal except for the cylinder head gasket surface.
2. No use of any substance to the inside or outside of the cylinder head. This includes no type of machining or grinding to increase compression or airflow. No milling or any alteration that could increase valve spring pressure.
3. Must be a Japan Tier III or must be a Thailand UT1 cylinder head stamped ATA or TK1 that meets the current specs. No Japan Tier II. Some of the original UT1 heads had grinding and filing marks located in the ports. Heads with grinding or filing will NOT be legal. It is your responsibility to make sure your motor’s head hasn’t been ground or filed. HPD has replacement heads available. UT2 heads will only be legal on a UT2 motor.

## INTAKE AND EXHAUST PORTS

1. Ports will be in “as cast” and factory machined condition and there must be no addition or subtraction of metal or any other substance to the inside or outside of the cylinder head.
2. No alterations of any kind to be made to the intake or exhaust port.
  - a. This includes any grinding, polishing, etching, sand blasting or glass beading to interior surface.
3. Valve Seats must be a stock 45 degree angle. Multiple angle valves are not permitted. Valve seats must not be replaced.
4. Intake and exhaust ports at valve:

Intake:	maximum 0.915”
	minimum 0.900”
Exhaust:	maximum 0.863”
	minimum 0.858”

Type to enter text



1. **Honda Performance Development has Honda replacement blocks available.**
2. This engine block must be in “as cast” and factory machined condition. There must be no addition or subtraction of metal or any other substance to the inside or outside of the cylinder block, crankcase cover, crankshaft, rod, piston, pin, rings, flywheel or coil with the following exceptions:
  - a. Removal of rear gas tanks brackets is permitted.
  - b. Removal of governor. Governor system may be partially removed with the exception of the steel gear on the crankshaft. This gear must remain intact. Governor arm and shaft may be removed, tied forward or altered to accommodate throttle linkage or returnsprings.
3. Addition of brackets, fittings etc. to accommodate throttle linkage, tachometer, temperature gauge is allowed.
4. Cylinder head gasket surface may be milled.
5. Check Bore:  
2.682” maximum.  
NOTE: All measurements taken from top to bottom of bore.  
Preferred method of measurement is a dial bore gauge, dial calipers may be used. Take out of service with no DQ or Suspension.
6. Check stroke:  
1.778 maximum  
1.758” minimum
7. Measure amount that piston is up or down from block surface at T.D.C. This will be measured at the edge of piston top and bottom, and side to side. When measuring top and bottom of piston take an average of the numbers measured. i.e. top = .003, bottom = -.003 the piston to deck would be .000. Measurement must NOT be taken in the center or relieved part of the piston. The dimension will be .000” Max. NO PISTON POP UP!! Carbon may be removed to check piston pop up.

8. Install degree wheel on flywheel. Install pointer in order to read degrees. Locate accurate T.D.C. This should be done with a positive stop type fixture and not established with indicator alone.
9. Cam will be checked with indicator reading off the top end of tappets which will provide zero clearance. The inverted radius of the top of the tappet presents some problem to get accurate readings and to prevent binding of indicator stem. Indicator holder and pistons are very critical in this operation.
10. Zero indicator on base circle of cam. Be sure that compression release does not affect zeroing exhaust indicator. Zero dial indicator after exhaust bump (0.050) ref.
11. Turning engine in normal rotation, clockwise facing flywheel, take reading at specified opening. Readings must fall between specified degrees on the following chart.
12. Check max lift at intake and exhaust.

#### **FLYWHEEL, FAN AND IGNITION SYSTEM**

Caution should be used when removing flywheel. Do not hit with hammer or other heavy objects. Service manual show flywheel to be removed with commercially available 6" puller. Another method is inertia type knocker that threads onto crankshaft end.

1. The transistorized magneto ignition is fixed at 25 degrees BTDC and may not be altered in anyway.
  - a. Firing must not exceed 0.104" or 26 degrees BTDC.  
Quick check: turning flywheel clockwise if the leading edge of the depression of flywheel rim where the magnet is mounted is not still under the right hand coil leg at .115" BTDC, it is probably illegal and should be checked further.

CAMSHAFT PROFILE INFORMATION							
INTAKE DEGREES				EXHAUST DEGREES			
0.050"	10.5 – 14	ATD		0.050"	206.5 – 210.5	BTD	
0.100"	26.5 – 30	ATD		0.100"	189.5 – 193.5	BTD	
0.150"	45 - 49	ATD		0.150"	170.5 – 174.5	BTD	
0.200"	71 - 76	ATD		0.200"	144 - 148	BTD	
MAX LIFT	0.227"			MAX LIFT	0.229"		
0.200"	135 - 141	ATD		0.200"	70.5 – 74.5	BTD	
0.150"	162- 167	ATD		0.150"	44.5 – 48.5	BTD	
0.100"	180 - 185	ATD		0.100"	26 – 29.5	BTD	
0.050"	197 - 201	ATD		0.050"	9 – 12.5	BTD	

## PROCEDURE FOR CHECKING TIMING

1. Ignition timing is to be checked with a degree wheel and a fixed pointer mounted on the engine. Use a piston stop tool inserted in the spark plug hole to properly locate the piston top dead center (TDC) position. Using a hand held electric drill, rotate the engine in a clockwise direction and with a timing light check the ignition timing.

Honda 160 UT1 -

Rotation speed between 1200 - 2000 RPM

Max. timing = 26 degrees

Flywheel key = Offset and or modified key is allowed.

Coil leg to flywheel gap = .035" Max.

Penalty for going over 26 degrees BTDC is a race day DQ only with loss of all points for that particular class.

2. Magnet and/or its position cannot be altered in any way.
3. Magnet retaining screw may not be altered in any way. Screw may not be replaced with larger or smaller screw. No heli-coiling of mounting hole.
4. Ignition coil and/or its position, may not be altered in any way. The air gap on the coil is a tech item with a max gap dimension, see (d) below.
  - a. Coil mounting bolts must be stock and cannot be altered in any way to advance or retard timing. Coil attaching bolts will be stock 6mm cap screw 1-1/16" long.
  - b. There can be no more than 3/8" of unthreaded portion of bolt that does not measure 0.230" diameter. This restricts movement of coil to a position that could make ignition timing illegal.
  - c. If a coil support mount becomes stripped, it is permissible to heli-coil. However, only one leg may be repaired, if both legs are heli-coiled, the crankcase becomes illegal.
  - d. Max air gap 0.035" - this can be accomplished with a set of feeler gauges. The gauge can't pass under the full length of each leg of the coil.
6. All nylon blades on the cooling fan must be intact. Race day DQ for any missing blades.
7. No metal may be added or removed from the flywheel.
8. Flywheel weight will be:  
2360 grams minimum
9. Flywheel diameter- magnet area:  
6.285
10. A stock Honda spark plug cap, (wire end at resistor), must be used.
11. Any unaltered automotive type spark plug & unaltered spark plug washer may be used.
12. No plug indexing washers allowed.
13. If temperature sensor is used under spark plug, factory washer may be removed.



## GEAR BOX AND RING GEAR



1. Gear box may not be altered in any way.
  - a. May be rotated to desired position.
2. Ring gear may not be altered in any way with the exception of keyed end of shaft that may be shortened, drilled and tapped or machined for snap ring groove. No other machining, drilling, grinding etc. to ring gear.
  - a. Keyway may be cut deeper.
3. Ring gear may not be altered in anyway including polishing or use of any compound or abrasive on gear shaft where bearings ride.
4. Two gaskets maximum between gear box halves.

## CRANKCASE COVER

1. Remove crankcase cover
2. Cover must be in "as cast" and factory machined condition and there must be no addition or subtraction of metal or any other substance to crankcase cover.
3. Crankcase cover gasket must be stock Honda. Only one gasket may be installed with a maximum thickness of 0.025".
4. Critical dimensions are thrust face of camshaft holder and position of crank bearing.
  - a. Place a straight edge over crank bearing and cam boss thrust face. These surfaces should be level.
  - b. Maximum tolerance will be 0.005". There will be no alterations to crankcase cover. This includes any alteration to crank bearing and camshaft holder position and height in an attempt to alter valve timing.

## **PISTON, WRIST PIN, AND PISTON RINGS**

1. Remove rod and piston- triangle or boss on top of piston must point toward push rods.
2. Piston, wrist pin and rings must be absolutely stock and not altered in any manner.

### **PISTON**

1. Piston will be stock Honda standard size and will not be altered in anyway.
2. Oversized pistons must not be used. The GX160 UT2 piston 13101-Z4M-800 will only be allowed in the UT2 motor.
3. All three piston rings must be used and installed properly.
  - a. Top ring: Chrome compression ring installed with "N". Thailand rings marked R on rail up. No expander under ring.
  - b. Middle ring: Oil scraper ring installed with "N" or "R" on rail up. No expander under ring.
  - c. Bottom ring: Three (3) piece oil rings are allowed. Check oil ring expander for alterations that will alter ring tension (cutting ends of expander etc.)
4. Piston may not be knurled, grooved or coated
5. Total Piston weight with rings, pin, and clips:  
200 grams minimum.
6. Total piston weight with rings, pin, clips, complete with rod and bolts:  
360 grams minimum.
7. No decreasing of ring tension by heating, machining or any other means.
8. Honda has released a new piston for the UT1 GX-160.
  - a. The GX160 UT1 (13101-Z4M-000) piston will be legal for USAC .25 midget competition beginning in 2012. The GX160 UT1 piston (13101-Z4M-000) will be stamped Z4M00 on the top of the piston. The side of the piston will be stamped Z4M.




**TOP VIEW GX160 UT1 PISTON (13101-Z4M-000)**




**SIDE VIEW GX160 UT1 PISTON (13101-Z4M-000)**

9. The current Tier III Honda GX160 Piston (13101-ZH8-020) and the Honda GX160 UT1 Piston (13101-Z4M-000) are both legal. They both have the same measurements from the centerline of the piston pin bore to the top of the piston (ring grooves included.)

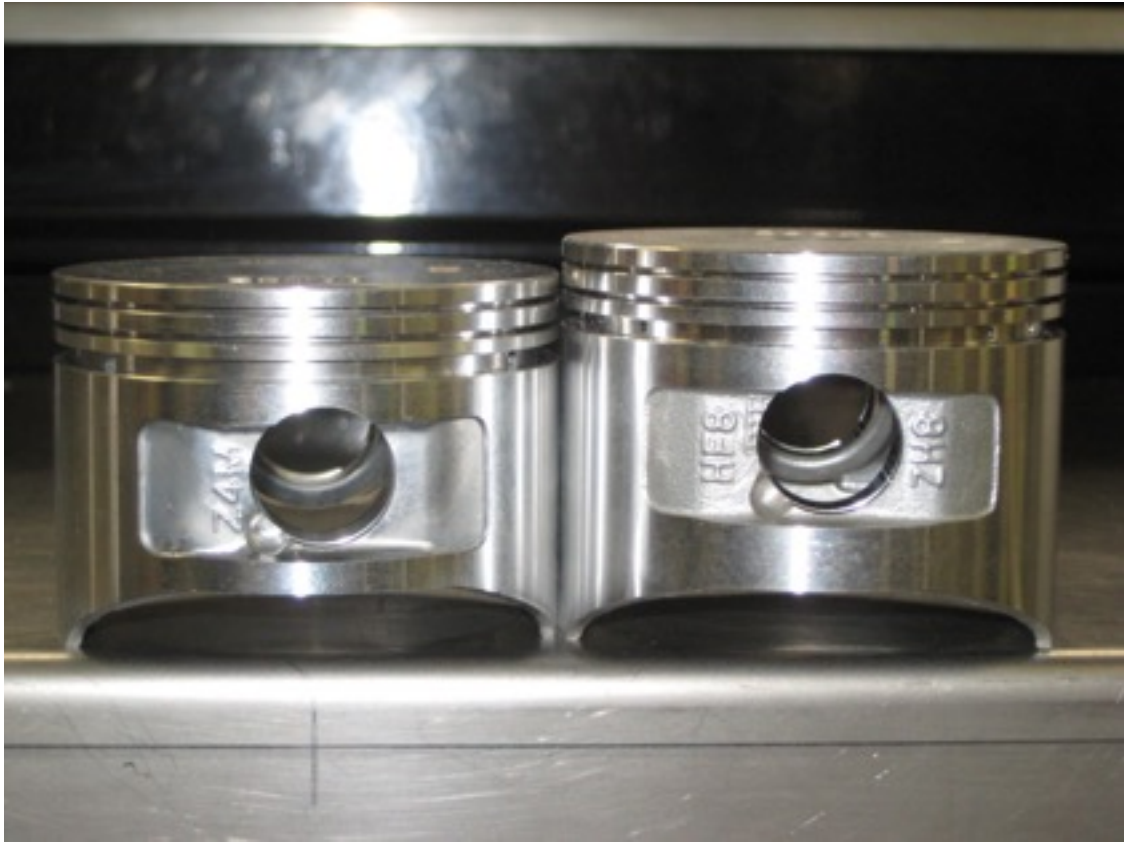

**Z4M PISTON (13101-Z4M-000) ZH8 PISTON (13101-ZH8-020)**

- 10. Piston Weight:**
  - a. Z4M PISTON (13101-Z4M-000)  
153-163 grams
  - b. ZH8 PISTON (1301-ZH8-020)  
158-168 grams
  
- 11. Total Piston Weight: (Rings, Pins, Clips)**
  - a. Z4M PISTON (13101-Z4M-000)  
195 grams minimum
  - b. ZH8 PISTON (13101-ZH8-020)  
200 grams minimum
  
- 12. Total Weight: (Rings, Clips, Rod & Bolts)**
  - a. Z4M PISTON (13101-Z4M-000)

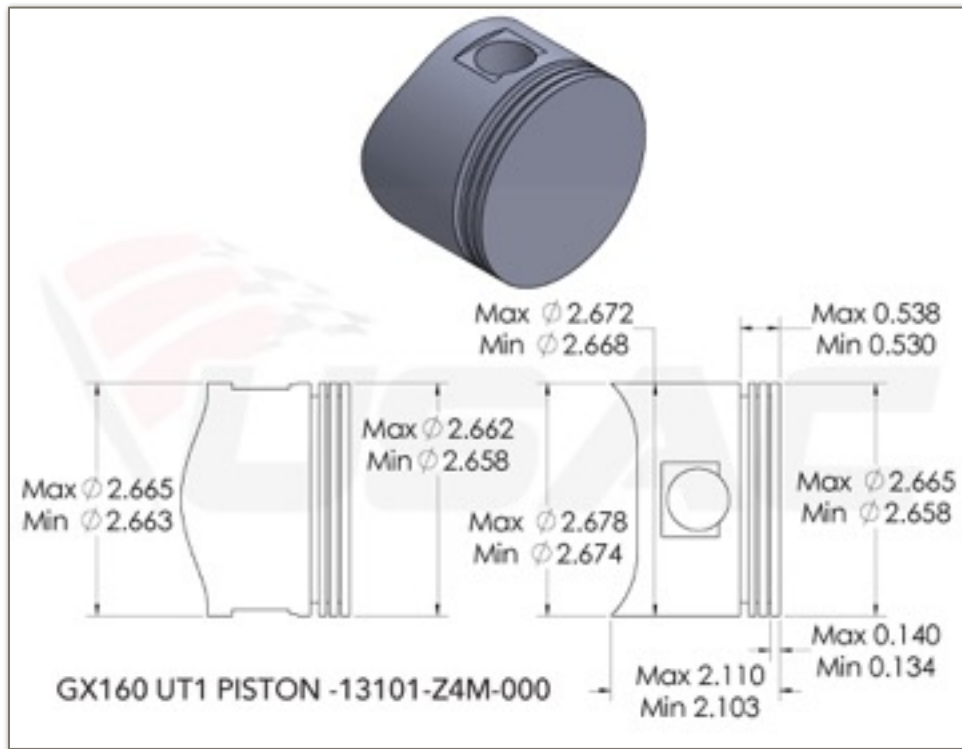

355 grams minimum

- b. ZH8 PISTON (13101-ZH8-020)  
360 grams minimum

**13. Piston Height:**

- a. Z4M PISTON (13101-Z4M-000)  
49.0 mm minimum
- b. ZH8 PISTON (13101-ZH8-020)  
53.5 mm minimum

**14. THE GX160 UT2 PISTON (13101-Z4M-800) IS ONLY LEGAL IN THE UT2 MOTOR, AND WILL NOT CONFORM TO THESE MEASUREMENTS.**

## RINGS

Must be stock Honda rings with stock size and configuration.

1. No decreasing of ring tension by heating, machining or any other means.
2. Tier III Piston Ring Thickness:
  - a. Compression: .038"min
  - b. Scraper: .038"min
  - c. Oil expander ring total length = 8.140 minimum
  - d. Oil Ring: 3 piece- .095" min
    - i. 1 piece: .097" min
3. The letter "N" or "T" on Tier III piston rings may not be legible after engine has been run.

## WRIST PIN

1. Stock Honda wrist pin and retainer
  - a. OD: Minimum 0.708"  
Maximum 0.709"
  - b. Length: Minimum 2.120"  
Maximum 2.128"
  - c. ID: 0.556" ref.
  - d. Weight: 40 grams minimum

## CONNECTING ROD



1. Stock Honda rod with no alterations.
2. Connecting rod big end size:
  - 1.176" minimum
  - 1.184" maximum
3. Pin end bore is: 0.710" ref.
4. Length from bottom of pin bore to top of big end bore will be:
  - 2.3755" maximum
  - 2.3580" minimum
5. Rod weight with bolts: 140 grams
6. No oil grooves on bearing surface of either end.

## CRANKSHAFT



**JAPAN CRANKSHAFT**



**THAILAND CRANKSHAFT**

1. Stock Honda crankshaft with no alterations.
2. No removal or addition of any metal from or to the crankshaft is allowed.
3. No balancing of the crank is allowed.
4. No oil grooving is allowed on the crank journal.
5. Governor drive gear cannot be removed.
6. Crankshaft drive gear should not be removed. This gear is installed by Honda to any accuracy of + ½ degree. If this gear is not installed to this degree of accuracy, engine may not be legal when camshaft is checked by the procedure under engine block.
7. Keyway location must not be altered in any manner.
8. Measure thrust to crank gear side + 3.340 Min.
9. The only cleaning method allowed is on the flywheel side of crankshaft for the purpose of removing calcium, rust etc. from the exposed end of the crankshaft. This is permitted only from the seal groove out to the end of the thread of the crankshaft where the flywheel bolts on. Only a wire wheel may be used in the cleaning process. The use of Scotchbrite, sandpaper or any other compounds or abrasives is illegal. No material may be added or removed from crankshaft. Thailand crankshafts have no heat treat marks.
10. Crankshaft main journal at flywheel and gearbox ends may not be altered in any way.

## CAMSHAFT





1. Camshaft must be stock Honda with no alteration of any kind.
2. There will be no additions to or subtractions from any part of the camshaft.
3. Compression release will remain intact and unaltered.
4. Lobe center angle will not be altered by any means.
5. Lobe profile will not be altered in anyway.
6. Camshaft specifications:
 

INTAKE	EXHAUST
Heel to Heel. 0.865"- 0.869"	Heel to Heel 0.866" – 0.870"
Heel to Peak 1.079"- 1.93"	Heel to Peak 1.081" – 1.095"

Length – thrust flange to thrust flange:  
     3.135" minimum  
     3.142" maximum
7. Cam bearings are 0.547" -0.551" and unaltered. If the bearing falls under the minimum of 0.547" they will be taken out of service with no penalty.

**TAPPETS**

1. Tappets must be stock Honda with no alterations.
2. Basediameter:
 

0.909" minimum	no maximum spec
----------------	-----------------
3. Stem diameter:
 

0.312" minimum	
----------------	--
4. Base thickness:
 

0.076" minimum	0.090" maximum
----------------	----------------
5. Length:
 

1.181" minimum	1.220" maximum
----------------	----------------
6. Weight:
 

16 grams minimum	
------------------	--

**ENGINE BLOCK INTERNAL**

1. The engine block must be in an "as cast" and factory machined condition and there must be no addition or subtraction of metal or any other substance to the inside or outside of the block except for cylinder head gasket surface may be milled to achieve 0.00 piston pop up.
2. Cylinder bore will be 2.682" maximum.

NOTE: All measurements taken from the top to the bottom of the bore, preferred method of measurement is dial bore gauge, dial calipers may be used. Take out of service with no DQ or suspension.

**"Wear Limits/Parts Out of Service"** USAC reserves the right to confiscate 160 Honda engine parts deemed illegal or at USAC maximum wear limits. EXAMPLE: Cylinder bore

will be 2.682 Max. all measurements taken from the top to the bottom of the bore parallel to crank, 90 degrees from crank. Any cylinder block that has one measurement over USAC maximum wear limits will be taken out of service. If no measurements exceed USAC maximum wear limits the part of block will not be confiscated. Handler has the right to have confiscated parts returned to them but will be rendered unusable.

3. Cylinder bore will not be bored oversize.
4. Cylinder bore will not be sleeved.
5. Cylinder bore position will not be moved or tipped in any manner.
6. There will be no polishing, sand-blasting or glass beading to any interior surface.
7. Machined surface of block down to thrust face of cam boss:  
3.220" minimum  
3.235" maximum
8. Machined surface of block down to bearing face:  
3.416" minimum  
3.435" maximum
9. Oil level sensor will be intact and unaltered. Wires may be externally disconnected or cut off.



**Tech officials have the right to tech any or all cars in any class at their discretion.**

**Parts in question that need further review, must be sealed and boxed up at the track in front of the handler. The handler and tech director must also sign a slip indicating that they both acknowledge the part is in question. The part must then be shipped to the USAC National office at 4910 West 16th Street, Speedway, IN, 46224.**

No.	Size of Drill
1	.228
2	.
3	.
4	.
5	.
6	.204
7	.
8	.
9	.
10	.
11	.184
12	.
13	.
14	.
15	.
16	.177
17	.
18	.
19	.
20	.

No.	Size of Drill
21	.1590
22	.1570
23	.1540
24	.1520
25	.1495
26	.1470
27	.1440
28	.1405
29	.1360
30	.1285
31	.1200
32	.1160
33	.1130

34	.1110
35	.1100
36	.1065
37	.1040
38	.1015
39	.0995
40	.0980

No.	Size of Drill
41	.0960
42	.0935
43	.0890
44	.0860
45	.0820
46	.0810
47	.0785
48	.0760
49	.0730
50	.0700
51	.0670
52	.0635
53	.0595
54	.0550
55	.0520
56	.0465
57	.0430
58	.0420
59	.0410
60	.0400

No.	Size of Drill
61	.0390
62	.0380
63	.0370
64	.0360
65	.0350
66	.0330
67	.0320
68	.0310
69	.0292

70	.0280
71	.0260
72	.0250
73	.0240
74	.0225
75	.0210
76	.0200
77	.0180
78	.0160
79	.0145
80	.0135

**Decimal Equivalents of Number Size Drills**